# HANLEY TILES

For FLOORS and WALLS

# HANLEY UNGLAZED FLOOR AND WALL TILE

The Hanley Company, long recognized in the field of burned clay and shale building materials, operates three modern factories producing distinctive types of unglazed floor and wall tile shown in this catalog, and a complete line of glazed double and triple structural units, hollow building tile, enameled, glazed and face brick. These are illustrated in Sweet's Architectural Catalog (refer to manufacturers Index).

Hanley unglazed floor and wall tiles are manufactured from skillfully blended select natural clays and shales, formed in a plastic state and specially burned at exceedingly high temperatures, to produce various natural rich colors in five different types of hard-burned vitreous tile.

HANLEY FLAME-TINTED TILE:-Distinctive for their gradually blended varying soft tones of color, smooth-textured surface and slightly rounded edges, giving a hand-made appearance, without increasing setting cost. Each color range is divided into three shades so that any combinations of individual shades or colors may be had in any pattern or treatment. All tile are supplied with slightly rounded (fettled) edges, unless square edges are specified.

HANLEY EVEN-TONE TILE:—Made from the same selected blends of natural clays and shales as Flame-Tinted tile, but burned by a different method to produce an even tone of rich color throughout the surface and body. A slight variation of shade in the full range adds interest to the pattern. Slightly rounded or square edges may be obtained in this type.

HANLEY RED QUARRY TILE:-Rich cherry-red hard-burned Bradford shale tile, having not more than 1/10 of 1% absorption and a very smooth, easily cleaned surface. They are particularly appropriate for locations demanding durability, cleanliness and attractiveness. Tests of every description performed by reputable laboratories and actual service have proven the superiority of Hanley Quarry Tile. Perfected-grade quarry tile (ground on four sides) may be laid with as narrow as 3/16" joints. Tile may be obtained with smooth or non-skid (diamond-mesh) surface.

HANLEY CERAMIC TILE:—Distinctively different rich natural colors, and slight irregularities in size, add interest and attractiveness at lower cost. The hard-burned vitreous clay and shale bodies are resistant to stains and chemicals and withstand severe wear. Cushion edge tile are made only in sizes of 2x2, 4x2 and 4x4. Square edge tile are made in all sizes. All 4x4 ceramics have grooved backs to increase the bond and reduce the cost of setting. All sizes may be obtained loose or mounted on paper in patterns desired.

HANLEY DUTI-TILE:—(Packing House Tile)—Designed for use in dairies, packing houses, etc., where a super-durable, ultra-sanitary floor is demanded which will withstand the food acids and severe use to which they are subjected. Absorption does not exceed 1/10 of 1% and tile may be laid with a 1/8" joint thereby increasing sanitation. Smooth or non-skid (Diamond Mesh) surface and grooved or scratch-bottom may be obtained. The thickness of the grooved bottom tile is 13/8" and the scratch-bottom tile is 11/4".

HANLEY GLAZED INSERTS:-Various designs are obtainable which add color and richness to floor and wall treatment. The relief surface of the design is glazed, the remainder of the tile being unglazed in varying shades of buff and brown.

# HANLEY COMPANY

MANUFACTURERS

FACTORIES: MAIN OFFICE:

BRADFORD, PA., SUMMERVILLE, PA., NEW BRIGHTON, PA. (Fallston Division) TILE DIVISION, 101 PARK AVENUE, NEW YORK CITY, N. Y. BRANCH OFFICE: BOSTON, 109 ALLERTON ROAD, NEWTON HIGHLANDS, MASS.

#### NATIONAL TILE COMPANY, INC.

ANDERSON, INDIANA

230 E. Grand River Avenue DETROIT, MICH.

3033 Fairmont Avenue FT. WORTH, TEXAS

1908 Railway Exch. Bldg. ST. LOUIS, MO.

P. O. Box 424 MIAMI, FLA.

1178 S. Labrea Avenue LOS ANGELES, CAL.

523 Owen Road ARDMORE, PA.

5926 Walnut Street PITTSBURGH, PA.

Room 405, 101 Park Avenue NEW YORK, N. Y.

DISTRIBUTORS

# HANLEY FLAME-TINTED AND QUARRY TILE COLORS

Refer to Schedule on Pages 5 and 6 for sizes and shapes in colors shown. Ceramic tile colors are shown on Page 7

#### RANGE C

Dark (225) and medium (226) varying shades of flame-tone centers blending to dark edges.

#### SHADE 210

Light and medium even tones of salmon. (Not a part of Range C)



## FALLSTON TILES

#### RANGE D

Deep chestnut (520), mottled russet browns (521), and subdued mottled buffs (522)



#### RANGE E

Flame-tinted varying shades of dark Van Dyke brown (220), Blending to burnt sienna (221), and light brown ochre (222)




#### SHADE 5

Charcoal black


#### SHADE 20

Flame-tinted dull red-flash centers blending to dark edges.



#### SHADE 10

Cherry red Quarry Tile (smooth and diamond mesh non-skid surface shown). Duti-tile made in same color. Absorption not exceeding 1/10 of 1%.




Any combination of standard shades and colors may be obtained in any pattern, design or treatment.

# HANLEY FLAME-TINTED AND QUARRY TILE DESIGNS

Design numbers refer to pattern only


Specify desired colors as noted on Page 2

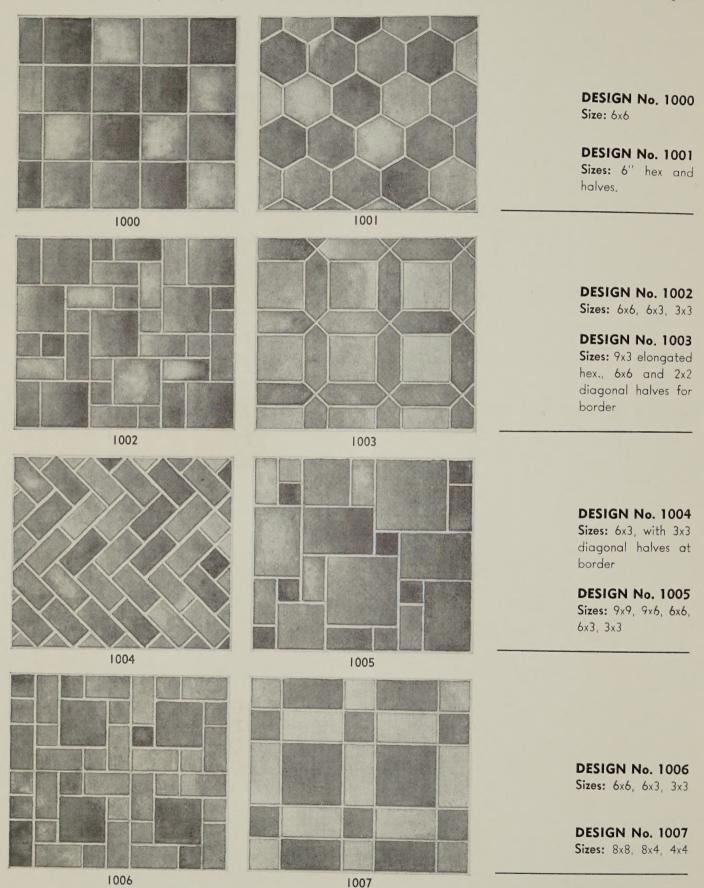


TILE DIVISION . HANLEY COMPANY . 101 PARK AVENUE, NEW YORK, N. Y.

# HANLEY HEAVY DUTY PACKING HOUSE TILE

For floors in packing houses, dairies, chemical plants, ice cream plants, etc., etc.



By reason of its low absorption (less than 1/2 of 1%) it is the ideal material where extreme sanitation and durability are essential. Impartial laboratory tests prove its superiority by the severest possible tests. Manufactured in red (shade 10) only.



# HANLEY FLAME-TINTED TILE FOR FLOOR AND WALLS

In residences theatres, hospitals, schools, churches, office buildings, banks, restaurants, etc.

# GENERAL SPECIFICATION FOR INSTALLATION of HANLEY TILE

Furnish all labor and materials for the completion of all tile work. The "Basic Specification For Tile Work", last edition (K-300) as issued by the Tile Manufacturers Association, 19 W. 44th Street, New York City, is hereby made a part of this specification insofar as it is applicable.

All tile (give type of tile; Ceramic, Flame-Tinted, Eventone or Quarry) to be standard grade as manufactured by the Hanley Co., Bradford, Pa. Refer to Hanley catalogue in Sweets Index for designs, color numbers, etc. Tile shall be provided in the following rooms or spaces, in sizes, designs, and colors as specified or detailed.


#### Names of rooms

Floor Field—Sizes (list sizes of tile) in Pattern No.

Colors—(List range or Shade No. as noted on Page 2.)


Floor Border—(Give colors and sizes)

Cap—Shall be (Give size, number and shade)



Sizes: 6x6, 3x3

Colors: To be specified from chart Page 2

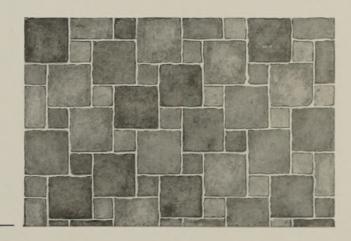

# SIZES AND COLORS OF FLAME-TINTED, EVEN-TONE AND QUARRY TILE

See Color chart and descriptions on Page 2 for all sizes in this schedule


COLOR RANGE		С		† D	E				WEIGHT	
COLOR DESCRIPTION		FLAME- TONE BLEND	SALMON	CHESTNUT, RUSSET AND BUFF	VAN DYKE BROWN TO OCHRE	CHARCOAL BLACK	DULL RED FLASH	CHERRY	OF TILE NOT PACKED. GIVEN IN POUNDS	
SHADE NUMBERS	DARK	225		520	220	5	20		PER SQ. FT	
	MED.	226	210	521	221			10		
	LIGHT			522	222					
SIZE	THICK- NESS	* DENOTES SIZES AND COLORS MADE ON ORDER								
12"x12"	11/8"	*	*	rite.	*		*	*	12	
12"x53/4"		*	*	*	*		*	*		
53/4"x53/4"		*	*	*(c	*			*		
9''x9''	7/8"	STOCK	STOCK	*	*		STOCK	STOCK	9.8	
8''x8''	3/4''	*	半	*	*	*	*	STOCK	8	
8"x4"		*	*	*	*	*	*	STOCK	8.2	
8"x21/4"							*	*	8.5	
6''x9''	10							STOCK	9.5	
6''x9''	3/4''	STOCK	STOCK	冲	STOCK		STOCK	STOCK	- 8	
6''x6''		STOCK	STOCK	*	STOCK	*	STOCK	STOCK		
6"x3"		STOCK	STOCK	*	STOCK	*	STOCK	STOCK	8.2	
3"x3"		STOCK	STOCK	*	STOCK	*	STOCK	STOCK		
4"x4"	1/2"							STOCK	5.5	
4"x4"	3/4''	STOCK	*	*	STOCK	*	STOCK	STOCK	8.2	
4''x2''		STOCK	水		STOCK	华	字	*		
2''x2''		STOCK	*		STOCK	**	*	*		
1"x1"		STOCK			STOCK		*	*		
9"" HEX.	7/8"	本	*		*		类	*	9.8	
9"x3" HEX.	3/4"	STOCK	*		*	*	*	*	8.2	
6" HEX.		*	*		STOCK	*	*	*	8	
8"x4" PACKING	13/8"							STOCK	1,4	
HOUSE TILE	11/4"							STOCK	16	
UBBLE RANDOM	VARIES	S OBTAINABLE IN A WIDE RANGE INCLUDING VARIOUS COLORS							8±	
INSERTS 3/4" STANDARD DESIGNS IN SIZES OF 6x6, 4x4, 2x2 GLAZED IN RELIEF ON BUFF UNGLAZED BODY									8	

† RANGE "D" TILE IS 1/8" THICK IN SIZES UP TO AND INCLUDING 6x6; 11/4" THICK INCLUDING 9x9; 13/4" THICK INCLUDING 12x12.

#### DIAGRAM OF STANDARD SIZES AND SHAPES

Diagonal halves obtainable in all square tile sizes, except IxI

Tile may vary slightly from actual dimensions given

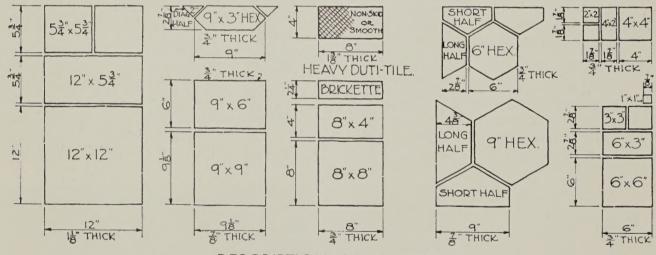

#### DESCRIPTION OF GRADES

**PERFECTED**—selected from standard grade and ground on all edges to exact dimensions, permitting installation with narrow string line joints. Only square edged tile obtainable in this grade.

**STANDARD**—the best grade of tile from the kiln. Sound and solid, approximately level and regular in lines with only slight variations in lengths and widths. Sorted to shades designated.

**SECONDS**—rejected from standard grade due to imperfections consisting of slightly broken corners and chipped edges. There are no cracks running into the tiles. They are not selected with care as to level surface and regular lines.


RUBBLE RANDOM—irregular broken pieces in various standard colors, sizes and thicknesses.

TILE DIVISION . HANLEY COMPANY . 101 PARK AVENUE, NEW YORK, N. Y.

# FLAME-TINTED, EVEN-TONE AND QUARRY TILE TRIM

Trim units are obtainable in all colors listed on Page 5

Shapes not shown will be furnished on special order

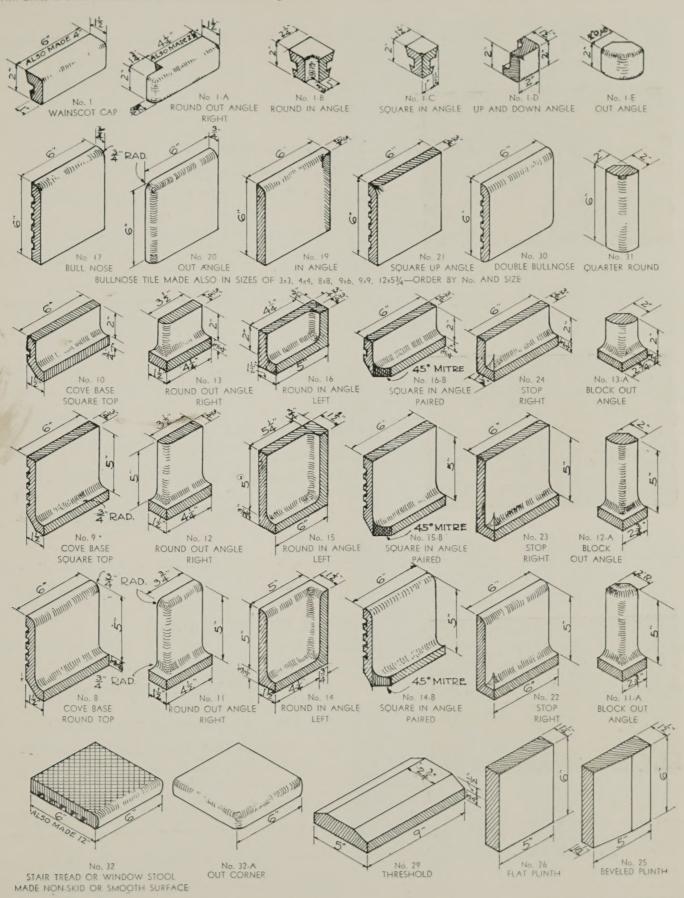

# HANLEY CERAMIC TILE COLORS AND DESIGNS

Design numbers refer to pattern only

Any combination of colors and sizes may be obtained in any pattern or design



#### DESIGN No. 2000


Sizes: 4x4, 4x2, 2x2, 2x1, 1x1

Colors: Shade C-210—Light and medium even tones

of salmon.

Shade C-225—Dark autumn brown blend (2x2

spots)



#### DESIGN No. 2002 (RANDOM)

Sizes: 4x4, 4x2, 2x2

Colors: Shade C-10—Cherry red (Absorption not ex-

ceeding 1/10 of 1%)

Shade C-6-Varying shades of gun-metal black



#### DESIGN No. 2004 (STAGGER)

Sizes: 4x4, 2x2

Colors: Range M-Shade C-225, C-226-Autumn brown blend in dark (C-225) and medium

(C-226) varying shades.

Shade C-6—Varying shades of gun-metal black

GLAZED INSERTS—Light and dark shades of green and blue glaze in relief with unglazed surrounding surface in varying shades of buff.

See Page 3 for additional patterns obtainable in any standard ceramic sizes as noted in table on Page 10

TILE DIVISION . HANLEY COMPANY . 101 PARK AVENUE, NEW YORK, N. Y.

# HANLEY CERAMIC TILE DESIGN SUGGESTIONS

Special designs may be obtained in any combination of standard colors and sizes Design numbers refer to pattern only

DESIGN No. 2005

Sizes: 4x4

Tile grooved on back

DESIGN No. 2006

Sizes: 4x4, 4x2

All 4x4 tiles grooved on back

DESIGN No. 2007

Sizes: 4x2, 2x2

DESIGN No. 2008

Sizes: 4x2, 2x2

DESIGN No. 2009

Size: 2x1

DESIGN No. 2010

Size: 4x2

DESIGN No. 2011

Size: 4x1

DESIGN No. 2012

Sizes: 4x2, 2x2 and 2x2 diagonal halves

DESIGN No. 2013

Sizes: 4x4, 2x2, 1x1


All 4x4 tiles grooved on brack

DESIGN No. 2014

Size: 4x2









2007



2008




2007




2010



2011



2012




2013



Cushion-edge and square edge tile are made in 4x4, 4x2 and 2x2 sizes on order only. All sizes are made with square edges

# HANLEY CERAMIC TILE WALLS AND FLOORS

For all types of buildings requiring attractiveness, sanitation and durability at low cost

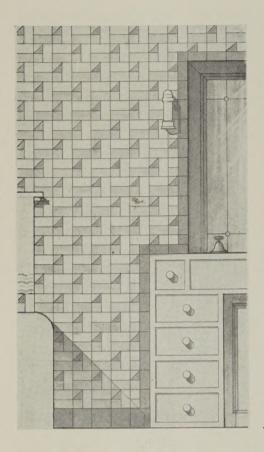


#### A Bathroom Design in Hanley Ceramic Tile

#### WALLS:

DESIGN No. 2012


Sizes: 4x2, 2x2 and 2x2 diagonal halves
Base: 4x4 square top cove bottom
Trim: 4x2 Bullnose and Angles



#### FLOOR:

DESIGN No. 2015

Sizes: 4x4 (with grooved backs) and 4x2 with 4x4 semi-glazed inserts



#### General Specifications for Ceramic Tile

All ceramic tile shall be standard grade, natural clay type as manufactured by Hanley Company, Bradford, Pa., and Summerville, Pa., in the following designs and colors (list designs and color numbers as noted on Page 7). Tile for base shall be No.

No. with necessary angles, stops and plinths in Shade No. Tile for cap shall be Shade No.

with necessary angles and stops.

Bullnose tiles with 3/4" radius shall be used at all external corners and around all uncased openings. All 4x4 tile shall have grooved backs and shall not exceed 3/8" in thickness. All tile shall have (Cushion Edges [obtainable in 4x2 and over]) or (square edges).

# HANLEY QUARRY TILE

All Hanley Red Quarry Tile are vitreous and under ordinary foot traffic will last indefinitely. Our complete tile catalogue is now available.

6x6x3/4 Non-Skid Type

Hanley Quarry Tile are ground on four sides to secure precision when installed. They are ideally adopted for interior and exterior use.



**MANUFACTURERS** 

Main Office, Tile Division
101 Park Avenue, NEW YORK, N. Y.


Factories

BRADFORD, PA. SUMMERVILLE, PA. Branch Office: 109 ALLERTON RD., BOSTON (NEWTON HIGHLANDS) MASS.


NATIONAL TILE COMPANY, Anderson, Ind.
Distributors

#### HANLEY HEAVY DUTY PACKING HOUSE TILE

For Floors in Packing Houses, Dairies, Chemical Plants, etc.



By reason of its low absorption (less than ½ of 1%) it is the ideal material where extreme sanitation and durability are essential. Impartial laboratory tests prove its superiority by the severest possible tests. Manufactured in red only.



8x37/8x13/8 Non-Skid Type Surface


Three types of tile base with all necessary angles are made to match color and texture of these paving tile. Send for our complete catalog.

Due to the dense texture of these tile, cleaning and maintenance costs are at a minimum. They are extremely acid resistant.

In order to insure satisfactory installations, we are prepared to furnish setting specifications to meet all conditions.

Exhaustive tests by prominent laboratory for absorption and abrasion shows the following results:

# RESULTS OF ABSORPTION AND ABRASION TESTS VARIOUS TYPES OF PACKING HOUSE TILE AND FLOOR BRICK

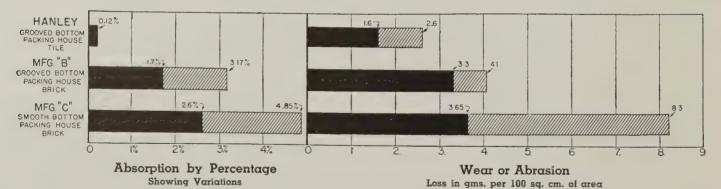


#### Partial List of Installations

Sheffield Farms Co., New York, N. Y.
Borden Farms Products, Newark, N. J., Brooklyn, N. Y.
Dairymen's League, Jamesburg, N. J.
Wilson & Company, New York, N. Y.
United Dressed Beef Co., New York, N. Y.
Cudahy Packing Co., Chicago, Ill.
Swift & Company, New York, N. Y.

American Sugar Refining Co., Brooklyn, N. Y.
Dugan Bros. Bakery, Queens Village, L. I., N. Y.
Continental Baking Co., New York, N. Y.
Clover Farms Dairy, Memphis, Tenn.
Breyer Ice Cream Co., Long Island City, N. Y.
Newark Milk & Cream Co., Newark, N. J.
Pioneer Ice Cream Co., New York, N. Y.

FACTORIES
Bradford, Pa. Summerville, Pa
New Brighton, Pa

MAIN OFFICE — TILE DIVISION
101 Park Avenue, NEW YORK, N. Y.



# NATIONAL TILE COMPANY, INC. ANDERSON, IND.

DISTRIBUTORS

DETROIT, MICH, 230 E. Grand River Avenue FORT WORTH, TEXAS, 3033 Fairmont Avenue PHILADELPHIA, PA., 6471 Morris Park Road ST. LOUIS, MO., 1908 Railway Exch. Building

MIAMI, FLA., P. O. Box 424 PITTSBURGH, PA., 5926 Walnut Street NEW YORK, N. Y., 437 - 11th Avenue CHICAGO, ILL., 37 West Van Buren Street

#### HANLEY UNGLAZED FLOOR AND WALL TILE

The Hanley Company, Leading Factors in the Field of Burned Clay and Shale Building Materials, operates three modern plants producing distinctive types of unglazed floor and wall tile shown herein and also a complete line of glazed structural units, enameled, glazed and face brick. These are shown in Sweets Architectural Catalogue (Refer to manufacturers' index).

Hanley unglazed floor and wall tiles are manufactured from skillfully blended selected natural clays and shales, formed in a plastic state and specially burned at exceedingly high temperatures, to produce various natural rich colors in five different types of hard-burned vitreous tile.

- HANLEY FLAME-TINTED TILE: Distinctive for their gradually blended varying soft tones of color, smooth-textured surface and slightly rounded edges producing a hand-made effect. Each color range may be had in any pattern or treatment. All flame-tinted tile are furnished with slightly rounded (fettled) edges, unless square edges are specified.
- HANLEY EVEN-TONE TILE: Made from the same selected blends of natural clays and shales as flame-tinted tile, but burned by a different method to produce an even tone of rich color throughout the body and surface. A slight variation of shade in the full range adds interest to the pattern. Slightly rounded or square edges may be obtained in this type of quarry tile.
- HANLEY RED QUARRY TILE: A rich cherry red hard-burned Bradford shale tile, having not more than ½ of 1% absorption and a smooth easily cleaned surface. They are particularly appropriate for locations demanding durability, cleanliness and attractiveness. Tests of every description undertaken by reputable laboratories and actual service conditions have proven the superiority of Hanley quarry. Perfected grade quarry tile (ground on four sides) may be laid with very narrow joints. Tile may be obtained with smooth or non-skid (diamond mesh) surface. A complete line of bullnoses and sanitary base are available.


- HANLEY CERAMIC TILE: Distinctively different rich natural and flashed colors add interest and attractiveness to this low cost material. The hard-burned vitreous clay and shale bodies are resistant to stains and chemicals and will withstand severe wear. Cushion edge tile are made only in sizes of 2x2, 4x2 and 4x4. All 4x4 ceramic have grooved backs to increase the setting bond. All sizes may be obtained loose or mounted on paper in patterns desired. Cove base and bull-nosed cap are also available for use as wall tile trimmers.
- HANLEY DUTI-TILE: (Packing house tile). Specially developed for use in dairies, ice cream plants, packing and food preparation plants, chemical plants, etc., where a super-durable, extremely sanitary floor is demanded which will withstand acids and the severe use to which they are subjected. Absorption does not exceed ½ of 1%. Size 8x37/8x13/8 thick.

#### -DESCRIPTION OF GRADES-

- **PERFECTED**—selected from standard grade and ground on all edges to exact dimensions, permitting installation with narrow string line joints. Only square edged tile obtainable in this grade.
- STANDARD—the best grade of tile from the kiln. Sound and solid, approximately level and regular in lines with only slight variations in lengths and widths. Sorted to shades designated.
- SECONDS—rejected from standard grade due to imperfections consisting of slightly broken corners and chipped edges. There are no cracks running into the tiles. They are not selected with care as to level surface and regular lines.
- RUBBLE RANDOM—irregular broken pieces in various standard colors, sizes and thicknesses.

#### HANLEY CERAMIC TILE COLORS AND DESIGNS

DESIGN NO. 2004 (Stagger)



DESIGN NO. 2004 (Stagger)

SIZES: 4x4, 2x2 (3/8" Thick)
COLORS: Shades C - 225 - 226
DARK AUTUMN FLASHED
REDDISH BROWN BLEND
FETTLED EDGES

#### This Pattern Shows the Flashing

in Hanley Ceramics to good advantage. The sewing room, sun parlor, game room, rumpus or recreation room are all vastly improved at low cost by the use of Hanley Fettled Edge Ceramic (all 3%" thick).

To enhance the decorative value of these floors we are prepared to furnish 2x2 and 4x4 glazed inserts, consisting of light and dark shades of green and blue glaze, the latter applied to the depressed portions of the tile, while the raised portions are in varying shades of buff.

#### DESIGN NO. 1002 (Random)



Design No. 1002 (Random)

SIZES: 4x4, 4x2, 2x2 (3/8" Thick)
COLORS: Shade C - 210, Full Range of SALMON with a slight shade variation,
FETTLED EDGES

#### This Color Has Many Uses

due to its subdued nature and reasonable uniformity of smooth color and light reflection characteristics. An ideal wainscoting material where a glazed tile would not prove suitable. Fettled edges enhance the appearance of these tiles.

#### DESIGN NO. 2002




Design No. 2002

SIZES: 4x4, 4x2, 2x2 (3/8" Thick)
COLORS: Shade C - 10 - CHERRY RED SQUARE EDGES.
2x2— Shade - C - 6 - Varying Shades
of GUN-METAL BLACK

#### Hanley Red Ceramic (Shade C-10)

is manufactured to secure a hard body, durable tile that is non-absorbent. These tile are vitreous by reason of their ½ of 1% absorption. They are tile of exceptional merit and are adopted for use where a quarry tile would prove too heavy. A complete line of base, cap and bullnose will permit these tile to be used for wall surfaces where a durable wall finish is desirable. The color and quality of Henley Ceramics cannot be altered by time or the elements.

#### HANLEY FLAME TINTED QUARRY TILE

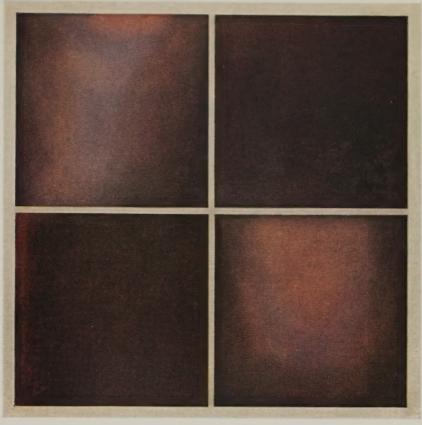


12" x 12" x 11/8" SHADES 220 - 221 RANGE

A New Product Developed by Hanley — Flametinted 12x12x11/8 quarry tile in shades 220-221 full range. These tile have distinctive flashed gun-metal tones that would add charm and character to residential entrances and stair halls.

They are also perfectly adopted to outdoor uses for terraces, sidewalks, approaches or as garden stepping stones. In the latter case they may be set directly on a shallow sand bed.


#### DIAGRAM OF STANDARD SIZES AND SHAPES

Diagonal halves obtainable in all square tile sizes, except 1x1. Tile may vary slightly from actual dimensions given.

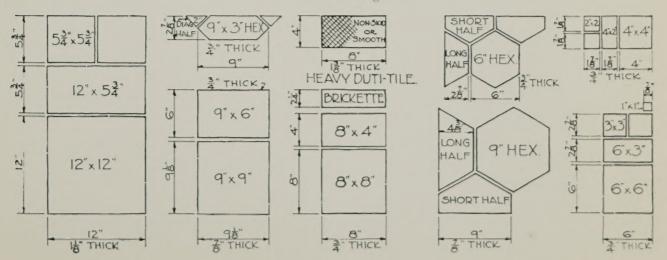

TILE DIVISION, HANLEY COMPANY, 101 PARK AVENUE, NEW YORK, N. Y.

#### HANLEY FLAME TINTED QUARRY TILE

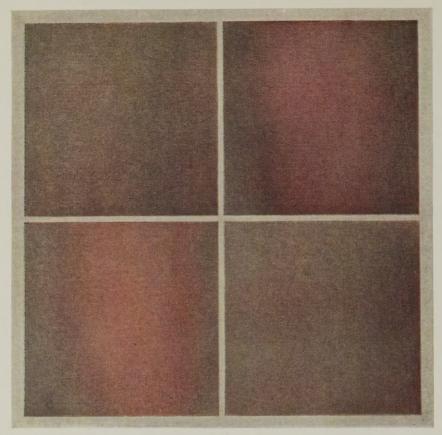

12" x 12" x 11/8" SHADES 120 - 121 RANGE

A pleasing Grey-Green Flashed range of shades, suggestive of early autumn colors in unusual tones of soft greens, blending into warm reddish shades. These tile are particularly attractive for laundries,

game rooms, etc., as well as for exterior terraces, promenades, roof gardens, and for garden walks or swimming pool approaches and surrounding areas. A truly fine product worthy of dignified surroundings.

#### GENERAL SPECIFICATION FOR INSTALLATION of HANLEY TILE

Furnish all labor and materials for the completion of all tile work. The "Basic Specification for Tile Work", 1937 edition (K-300) as issued by the Tile Manufacturers Association, 19 W. 44th Street, New York City, is hereby made a part of this specification insofar as it is applicable.

All tile (give type of tile; Ceramic, Flame-Tinted, Eventone or Quarry) to be standard grade as manufactured by the Hanley Co., Bradford, Pa. Refer to Hanley catalogue for designs, color numbers, etc. Tile shall be provided in the following rooms or spaces, in sizes, designs, and colors as specified or detailed.

Names of rooms

Floor Field—Sizes (list sizes of tile) in Pattern

Colors—(List range or Shade Numbers).

Floor Border— (Give colors and sizes)...

Base—Tile for base to be cove base No......with necessary angles, stops and plinths in Hanley shade number.....

Cap—Shall be (Give size, number and shade).....

Where unusual construction conditions or special uses may require specific methods and materials for setting, we are prepared to furnish specifications for such purposes. Our consultants are at the service of architects, engineers and contractors.

Hanley Red Quarries, Shade 10, are designed for utility as well as decorative purposes in and about the home. Porches, sun decks, terraces, etc., all lend themselves to the use of these tile which are impervious to extremes of weather. Tile base, bullnoses, stair treads, and threshold tile are available.

TILE DIVISION, HANLEY COMPANY, 101 PARK AVENUE, NEW YORK, N. Y.

# HANLEY CERAMIC TILE SIZES, COLORS AND SHAPES

